

VALVE BOX AND COVER  
SEE TUCSON WATER SD-300,  
PAGES 1&2, AND MDWID  
STANDARD DETAIL MW-300

2" SQUARE OPERATOR NUT

STABILIZING DISC AND COLLAR

VALVE NUT EXTENSION REQUIRED  
ON ALL INSTALLATIONS WHERE  
VALVE OPERATING NUTS ARE 5'  
OR MORE BELOW FINISHED GRADE

CONTINUOUS LENGTH 6" PVC  
PIPE, LENGTH AS REQUIRED

SQUARE SOCKET, SIZED TO FIT  
VALVE OPERATOR NUT, SEE NOTE 4

18" MIN.  
24" MAX.


6"

VARIES

VALVE OPERATOR NUT

VALVE

MAIN

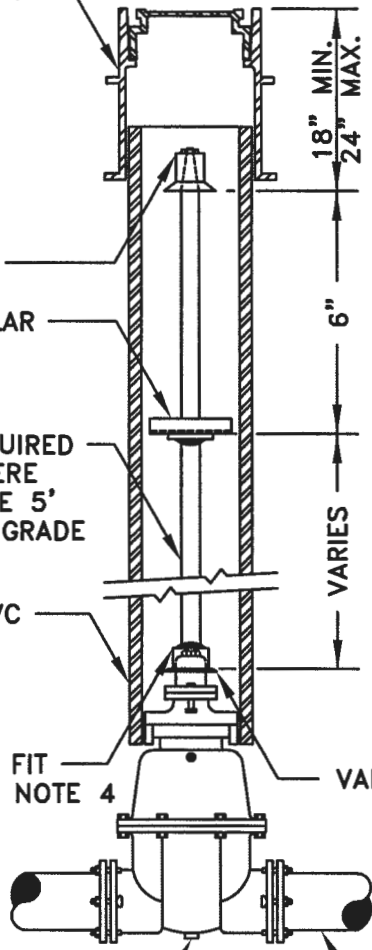

**NOTES:**

1. OPERATOR NUT, VALVE NUT EXTENSION, DISC & COLLAR & SQUARE SOCKET SHALL ALL BE CENTERED VERTICALLY OVER VALVE OPERATOR NUT.
2. VALVE NUT EXTENSIONS TO BE SUPPLIED BY THE CONTRACTOR.
3. THIS DETAIL REPLACES TUCSON WATER SD-305, SHEET 1 OF 2 ONLY.
4. VALVE NUT EXTENSION SHALL NOT BE PERMANENTLY ATTACHED TO VALVE NUT.



**VALVE NUT EXTENSION**

ISSUED: 01/99

SCALE: N.T.S.

PAGE 1 OF 1

S.D.# MW-305